

Fast Recovery Rectifiers

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 1.5 A


FEATURES

- Low Cost
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- Fast Switching Speed For High Efficiency

MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.014ounce, 0.33 gram

DO-15

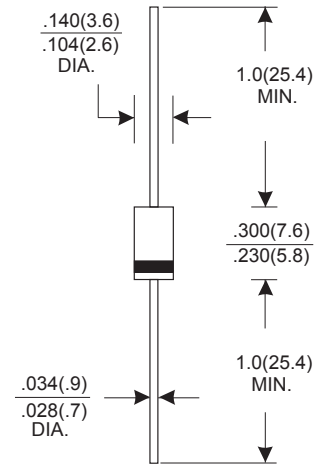

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

TYPE NUMBER	Symbols	Units	FR151	FR152	FR153	FR154	FR155	FR156	FR157		
Maximum repetitive peak reverse voltage	VRRM	V	50	100	200	400	600	800	1000		
Maximum RMS voltage	VRMS	V	35	70	140	280	420	560	700		
Maximum DC blocking voltage	VDC	V	50	100	200	400	600	800	1000		
Maximum average forward rectified current 9.5mm lead length at T _A =55°C	I _{F(AV)}	A	1.5								
Peak Forward Surge Current, 8.3ms single half-wave superimposed on rated load (JEDEC method)	I _{FSM}	A	60								
Operating junction temperature range	T _J	°C	-65to+125								
Storage temperature range	T _{stg}	°C	-65to+150								
Maximum instantaneous forward voltage at 1.5A	V _F	V	1.3Max.								
Maximum DC reverse current at rated DC blocking voltage	T _a =25°C	R1I	5.0Max.								
	T _a =100°C	R2I	100.0Max								
Maximum reverse recovery time (test conditions: I _F =0.5A, I _R =1.0A, I _{RR} =0.25A)	T _{rr}	nS	150				250		500		